



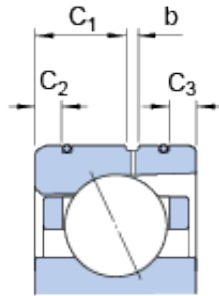

TRAY BEARING-MALAYSIA SDN.BHD.

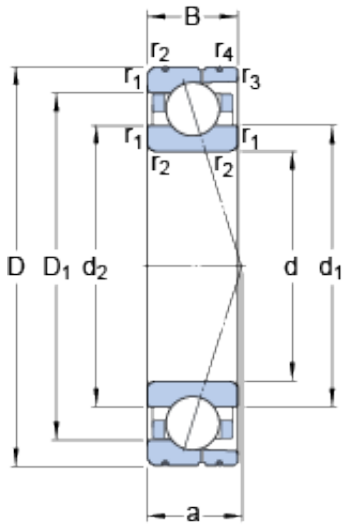

80 mm x 110 mm x 16 mm SKF 71916
CD/P4AL angular contact ball bearings

Bearing No. 71916 CD/P4AL

71916 CD/P4AL Bearing 2D drawings and 3D CAD models

Size	110x80x16 mm
Bore Diameter	110 mm
Outer Diameter	80 mm
Width	16 mm
d	80 mm
D	110 mm
B	16 mm
d ₁	89.2 mm
d ₂	89.2 mm
D ₁	100.8 mm
b	2 mm
C ₁	8.6 mm
C ₂	3.5 mm
C ₃	2.8 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.3 mm
a	20.8 mm
d _a - min.	84.6 mm
d _b - min.	84.6 mm
D _a - max.	105 mm
D _b - max.	108 mm
r _a - max.	1 mm
r _b - max.	0.3 mm
d _n	91.7 mm



TRAY BEARING-MALAYSIA SDN.BHD.

Basic dynamic load rating - C	36.4 kN
Basic static load rating - C ₀	39 kN
Fatigue load limit - P _u	1.7 kN
Limiting speed for grease lubrication	11000 r/min
Limiting speed for oil lubrication	18000 mm/min
Ball - D _w	9.525 mm
Ball - z	27
G _{ref}	5.1 cm ³
Calculation factor - f ₀	16.5
Preload class A - G _A	140 N
Preload class B - G _B	280 N
Preload class C - G _C	560 N
Preload class D - G _D	1120 N
Calculation factor - f	1.24
Calculation factor - f	1
Calculation factor - f _{2A}	1
Calculation factor - f _{2B}	1.04
Calculation factor - f _{2C}	1.09
Calculation factor - f _{2D}	1.15
Calculation factor - f _{HC}	1
Preload class A	85 N/micron
Preload class B	117 N/micron
Preload class C	167 N/micron
Preload class D	246 N/micron
d ₁	89.2 mm
d ₂	89.2 mm
D ₁	100.8 mm
C ₁	8.6 mm



TRAY BEARING-MALAYSIA SDN.BHD.

C_2	3.5 mm
C_3	2.8 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.3 mm
d_a min.	84.6 mm
d_b min.	84.6 mm
D_a max.	105 mm
D_b max.	108 mm
r_a max.	1 mm
r_b max.	0.3 mm
d_n	91.7 mm
Basic dynamic load rating C	36.4 kN
Basic static load rating C_0	39 kN
Fatigue load limit P_u	1.66 kN
Attainable speed for grease lubrication	11000 r/min
Attainable speed for oil-air lubrication	18000 r/min
Ball diameter D_w	9.525 mm
Number of balls z	27
Reference grease quantity G_{ref}	5.1 cm ³
Preload class A G_A	140 N
Static axial stiffness, preload class A	85 N/ μ m
Preload class B G_B	280 N
Static axial stiffness, preload class B	117 N/ μ m
Preload class C G_C	560 N
Static axial stiffness, preload class C	167 N/ μ m
Preload class D G_D	1120 N
Static axial stiffness, preload class D	246 N/ μ m



TRAY BEARING-MALAYSIA SDN.BHD.

Calculation factor f	1.24
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.04
Calculation factor f_{2C}	1.09
Calculation factor f_{2D}	1.15
Calculation factor f_{HC}	1
Calculation factor f_0	16.5
Mass bearing	0.37 kg